


KELVIN CLAMP

PRACTICAL FOUR-WIRE MEASUREMENT

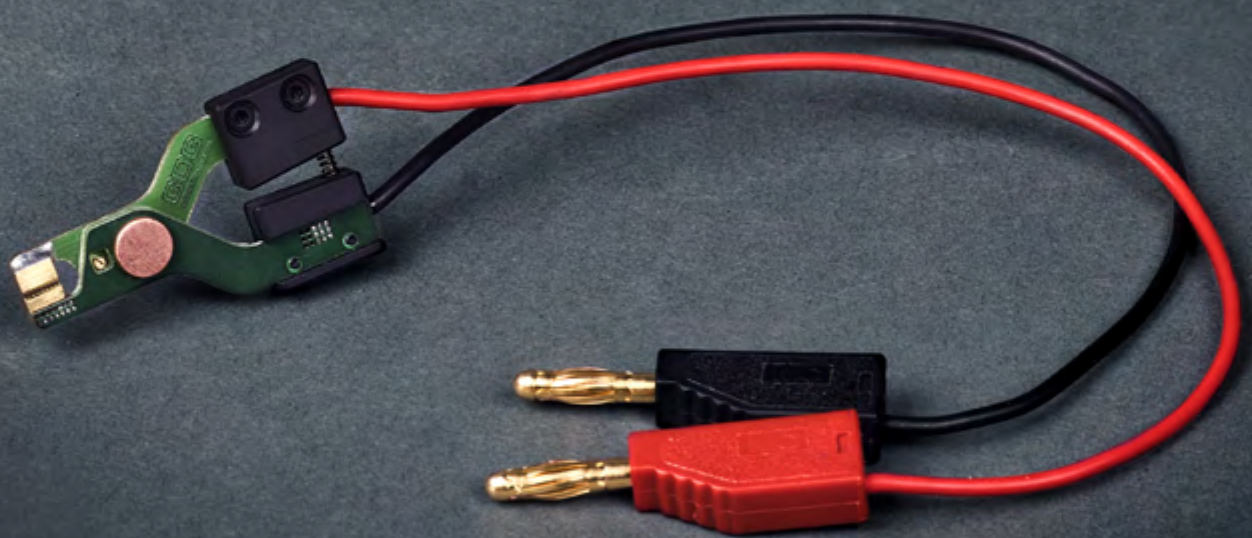

G D G
testsystems

KELVIN CLAMP

PRACTICAL FOUR-WIRE MEASUREMENT


GDG
testsystems



KELVIN CLAMP

Technical data

opening width	1,5 - 2 mm	(other opening width on request)
compression force	10 - 25 N	
four-wire technology	yes	
terminal contact	gold-plated	
dimensions (w x h x d)	26 x 6 x 46,5 mm	
test leads length	200 mm	(other length on request)
test leads terminals	4 mm lab plug gold plated	(other connector on request)

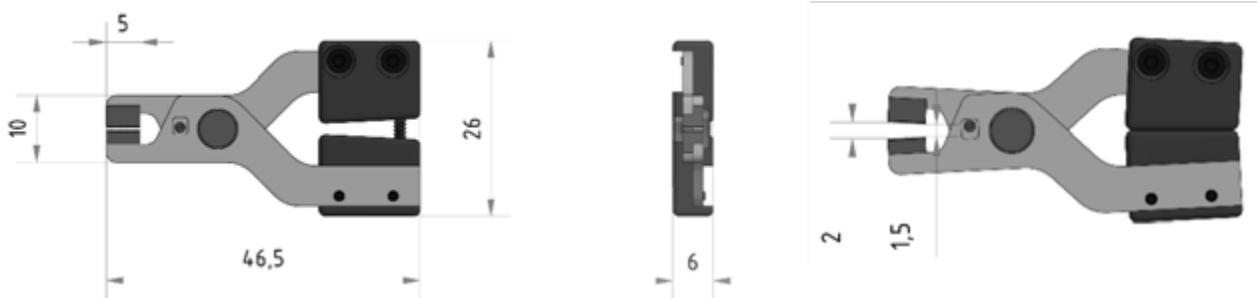

- versatile application possibilities e.g. stranded wires, cable lugs, terminals and contact pins
- ideal for four-wire measurement
- main and sense contacts not connected when not in use (>0.3 mm)
- permanently connected test leads
- 4 mm laboratory plug
- improved contact resistance due to gold-plated contacts
- optimum grip due to ribbed contact surfaces

GDG Gerätebau GmbH
Lochmatt 8 . 77880 Sasbach
Germany

Tel: +49 7841 7028-60
info@gdg-testsystems.de
www.gdg-testsystems.de

